


# **NetGain Motors, Inc.**

800 South State Street / Suite 4 / Lockport, IL 60441 / 630-243-9100 / 630-685-4054 (FAX)

## **TransWarP 9™**

*Motors*

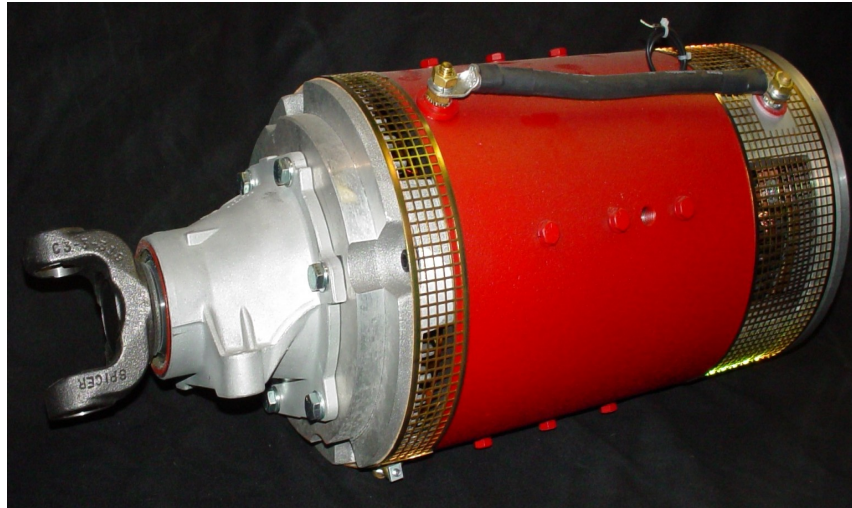

### Fact Sheet

- HP = 32.3 HP (72 Volts, 335 Amps)
- 70 Ft. pounds torque
- Weight, approx. 156 pounds
- 5,500 RPM's
- designed for direct drive applications

### Standard Features

- 9.25" diameter, series wound DC motor
- CE shaft 1.125" same as DE on WarP 9 - simplifies double motors!
- Advanced timing – factory set CCWDE (CWDE available)
- Requires Turbo 400 “shorty” tailshaft housing & slip-yoke (extra!)
- Commutators key locked onto the shaft
- High quality, large brushes, factory pre-seated at over 90%
- Turbo 400, 32 tooth splined shaft (1.370")
- Exceeds Class “H” insulation for temperatures
- grease fittings
- Delivery – from stock

### Insiders Note

This motor was designed for two purposes, EMIS installations and dual motor, direct drive applications (when coupled to a **WarP 9**) The CE shaft of the **TransWarP 9** matches the DE shaft of the **WarP 9**.