


NetGain Motors, Inc.

800 South State Street / Suite 4 / Lockport, IL 60441 / 630-243-9100 / 630-685-4054 (FAX)

Continuous - 350 Amp Motor Graph - Temp 100°C

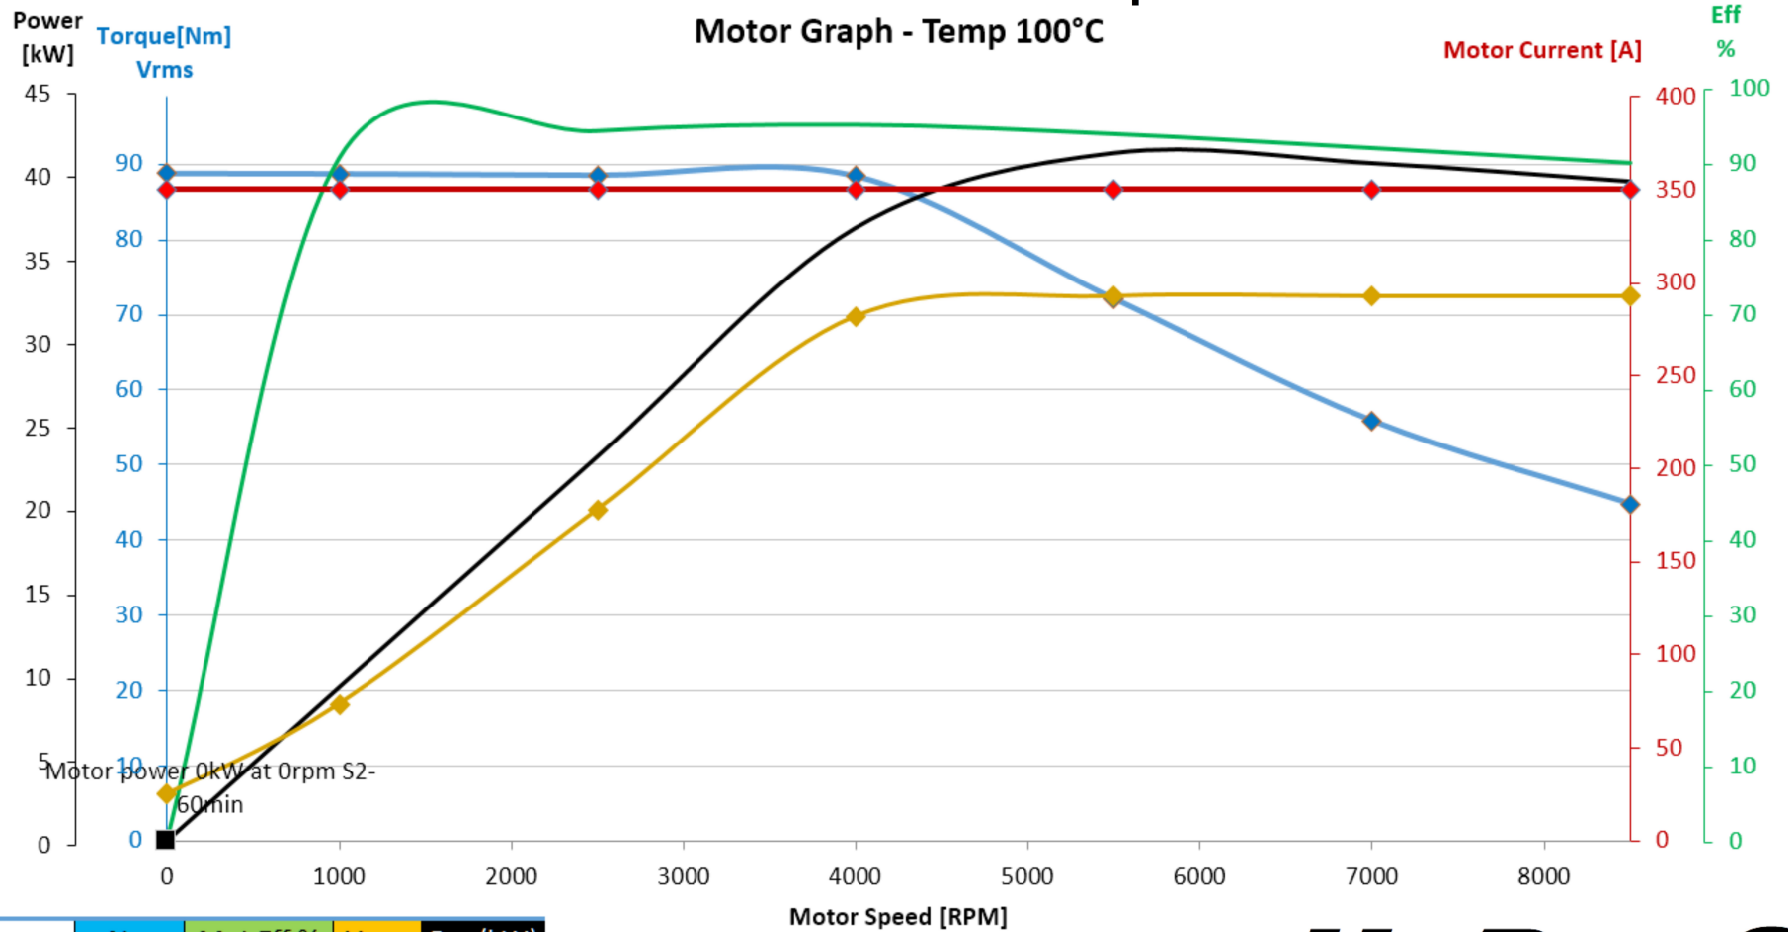

Rpm	Nm	Mot Eff %	Vrms	Pm (kW)
0	88.8	0.0	6.2	0.0
1000	88.7	91.7	18.2	9.3
2500	88.5	95.4	44.0	23.2
4000	88.4	96.2	69.8	37.0
5500	72.1	95.0	72.5	41.5
7000	55.8	93.1	72.5	40.9
8500	44.7	91.1	72.5	39.8

DC Supply:
108V

Hyper 9™
& **Hyper 9D™**