


TransWarp 11™

Motors

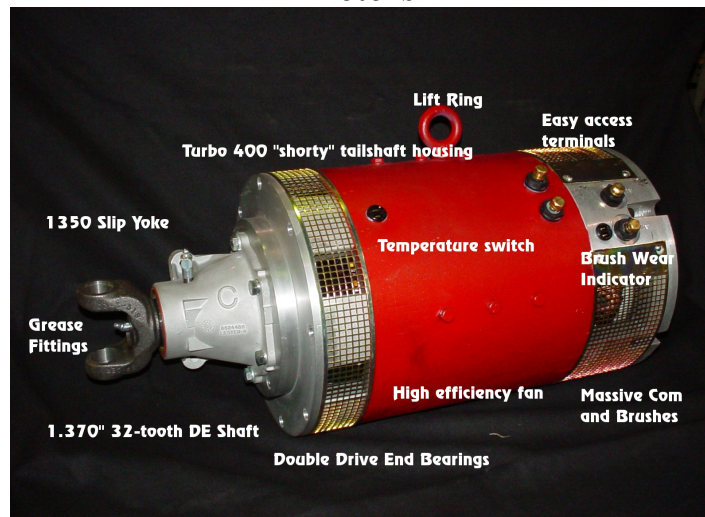

Standard Features

- 11.45" diameter, series wound DC motor
- Weight, approx. 229 pounds
- 43.7 HP (72 Volts, 453 Amps)*
- 135 Ft. pounds torque*
- 5,500 RPM's
- Developed for direct drive applications – double DE bearings!
- Advanced timing – factory set for CCWDE (CWDE available)
- 1.125" keyed CE shaft (matches 08311 DE)
- 8 CE mounting holes (for alternator, air conditioner, etc.)
- Commutators key locked onto the shaft
- High quality, large style brushes, factory pre-sealed over 90%
- Exceeds Class "H" insulation – temperature snap switch + brush wear indicator
- Turbo 400, 32 tooth splined shaft
- Slip yoke assembly and tail shaft housing also available as options
- Delivery – from stock

* Dynamometer tested operating conditions

Available from:

Manufactured Exclusively For:
NetGain Technologies, LLC

900 North State Street – Suite 101
Lockport, IL 60441
630-243-9100
go-ev.com

TransWarp 11™

Motors

Description	Part	MSRP
CE Shaft, Advanced Timing	00-08711	\$3,350.00
Diameter	11.45 inches	
Length (case)	16.772 inches	requires
Weight	235 lbs.	tailshaft housing
Drive Bearing	TBD	
Com Bearing	10222240	\$15.25
Field Coil Set	11145080	\$783.00
Springs #	11840510 * 8	\$14.75
Brushes #	10345064 * 4	\$58.50
Brush Holder	10440100	\$490.00
Armature	3002308711FN	\$2,812.25
CE Head	10608711	\$1,110.75
DE Head	10908711	\$1,275.00
Mounting Pattern	Fits Turbo 400 transmission mount, requires additional CE support	
DE Length		
DE Diameter	1.370"	
DE Keyway	32 tooth Turbo 400 spline	
DE Pilot	7.750" Dia	N/A
DE Mounting Hole	5/16" – 18	N/A
Slip Yoke (1350)	assembly required for shaft/housing	\$250.00
Tail shaft housing	Turbo 400 "shorty" tail shaft housing	\$225.00
CE Length	2.268"	
CE Diameter	Same as 08311 DE diameter 1.125"	
CE Mounting Hole	¼" – 20	
Case Steel	1020 or similar	



Quality components
make a
quality motor!

TORQUE ABOUT IT!
Warp
Motors

NetGain Technologies, LLC
go-ev.com